

Material:
* Contact: Brass

Ordering Code

CH71 ** * V * **
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits

③ Plating Code:

1= 3.05 μm (120 μ "") Min. Tin
over 0.76 μm (30 μ "") Nickel

2= Gold flash plated
over 1.27 μm (50 μ "") Nickel

3= 0.38 μm (15 μ "") Gold plated over
1.27 μm (50 μ "") Nickel


4= 0.76 μm (30 μ "") Gold plated over
1.27 μm (50 μ "") Nickel

④ V= Straight

⑤ Insulation: 1= PBT UL 94V-0, Color Black
A= Nylon 6T UL 94V-0, Color Black

⑥ Pin Length Option cord:

See Table PDF. File No. CH7101T

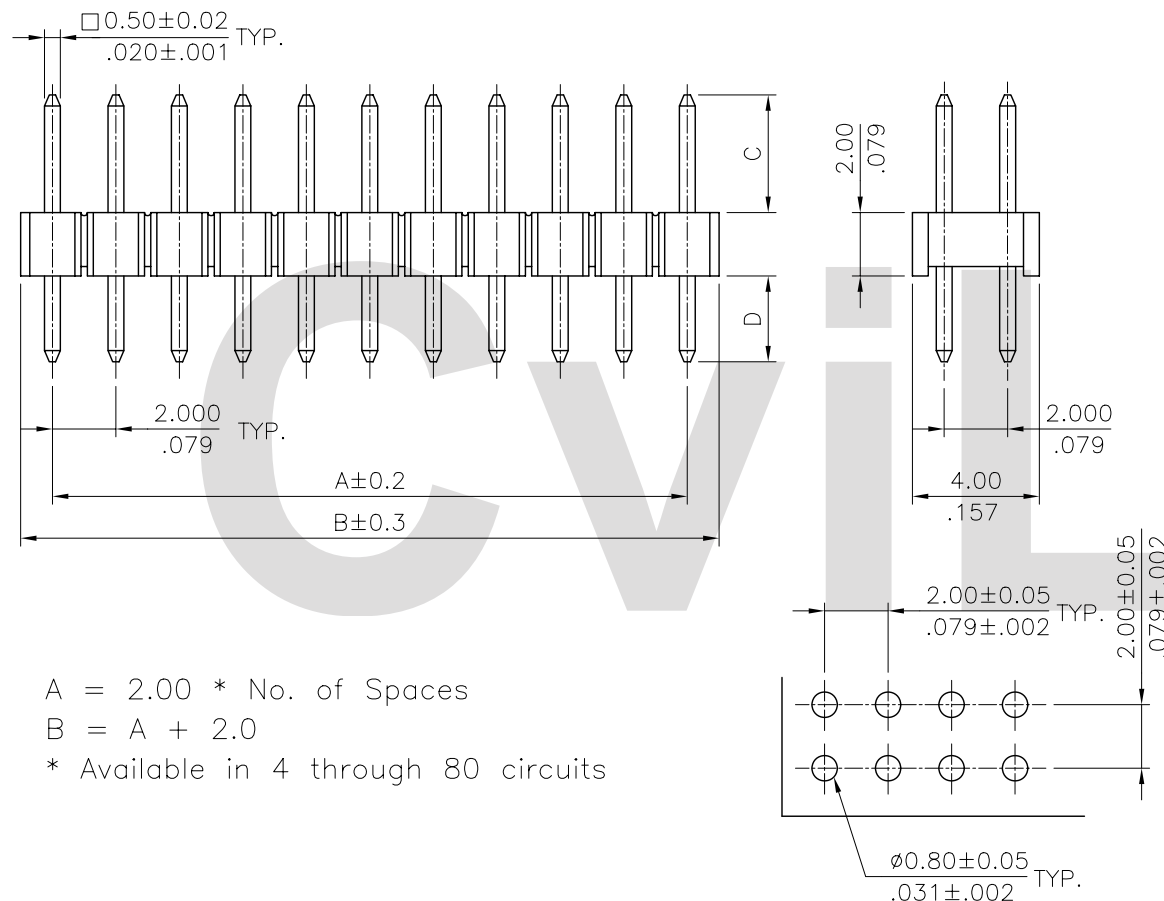

A = 2.00 * No. of Spaces

B = A + 2.0

* Available in 4 through 80 circuits

Recommended P.C. Board Layout

RoHS Compliant

④				CIVILUX.CORP		DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") STRAIGHT	 瀚荃股份有限公司 CviLux Corporation			
③	Sun	1/19/06'	ECN06019	2006.01.31	DRAWN BY: Sun	1/24 06'	TOLERANCE	DUAL ROW BORAD MOUNT PIN HEADER				
②	Casey	5/28/04'	ECN04208	ISSUED	ENGINEER: Eisle	1/26 06'	UNLESS OTHERWISE SPECIFIED		DRAWING NO. CH7101SG PART NO. CH71***V***			
①	SUN	4/09/04'	ECN04144		CHECKED BY: David	1/27 06'						
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	1/27 06'			SCALE 4 / 1 SHEET 1 OF 1			