




電鍍後捲料方向

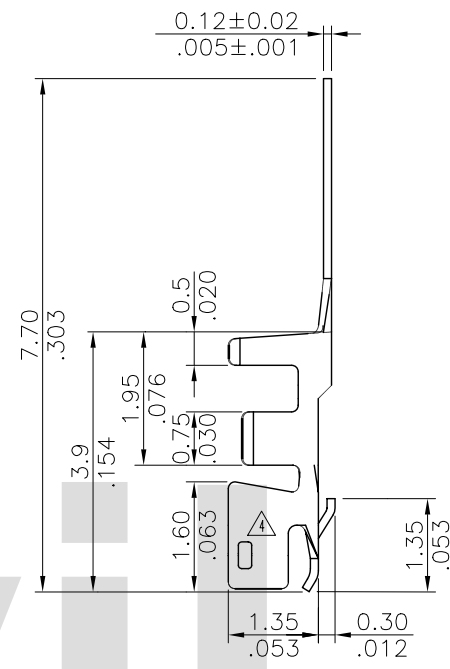

SEC. A-A
SCALE 10/1




SEC. B-B
SCALE 10/1

Wire Range	Insulation Diameter	Reel Q'ty
AWG #28~#32	0.4~0.8(mm)	16,000 PCS.

Ordering Code:

CI11 T01 * P P 0
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Type: T01= AWG #28~ #32
- ③ Plating: 1= 2.03μm(80μ") Min. Tin over 0.76μm(30μ") Nickel
2= Gold Flash plated over 1.27μm(50μ") Nickel
- ④ Material: P= Phosphor Bronze
- ⑤ Plating method: P= Post plating
- ⑥ Option: 0= Standard



DETAIL C
SCALE: 15/1

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT:	TITLE:	DRAWING NO. CI1105SG PART NO. CI11T01*PPO			
6	Hank	2/25/09'	ECN09081		DATE	mm / inch	FOR CI11 SERIES CRIMP TERMINAL	SCALE 7 / 1 SHEET 1 OF 1			
5	Sandy	8/22-07'	ECN07330/ECR07047-2	DRAWN BY: Hank	2/25-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED .X ± 0.30/.012 X' ± 1' .XX ± 0.20/.008 .X' ± .XXX ± 0.10/.004 .XX' ±	MATERIAL:	SHEET 1 OF 1			
4	Clark	10/2/06'	ECN06302	ENGINEER: Easley	2/26-09'			FINISH:	SHEET 1 OF 1		
3	Jim	8/1/06'	ECN06207	CHECKED BY: Easley	2/26-09'				SHEET 1 OF 1		
				APPROVED BY: Alex	2/26-09'				SHEET 1 OF 1		



瀚荃股份有限公司
CviLux Corporation