
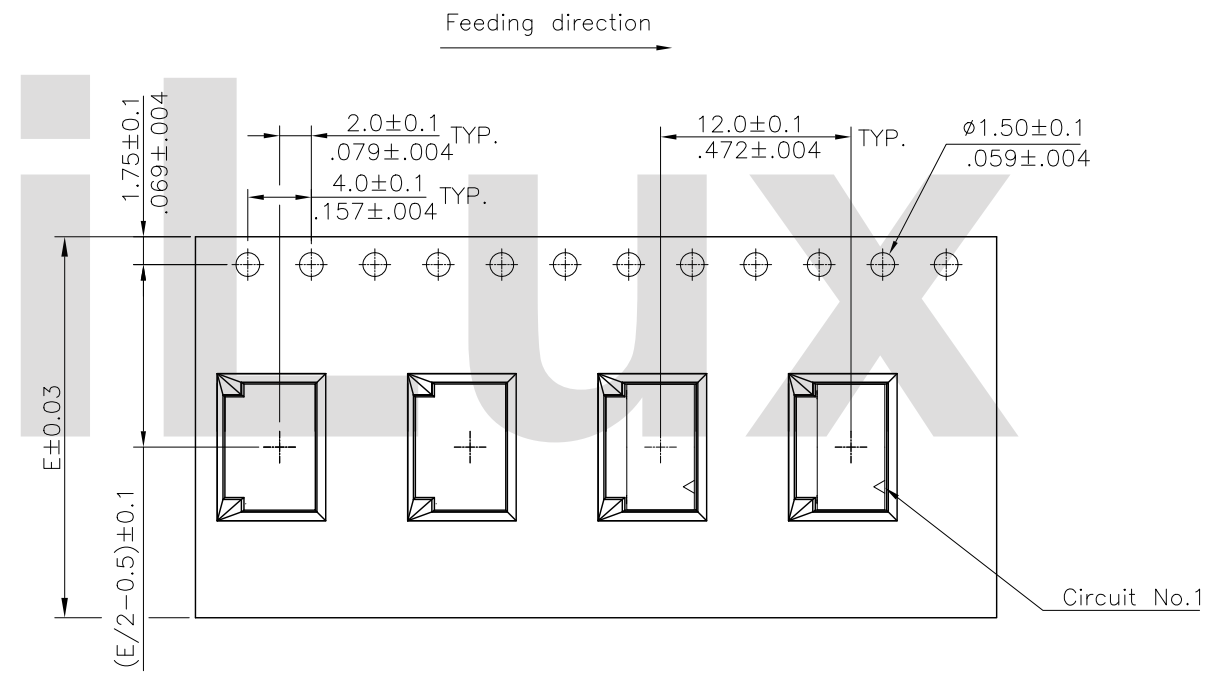


- NOTES:
1. 10 sprocket hole pitch cumulative tolerance  $\pm 0.20$
  2. Carrier camber is within 1 mm in 250 mm.
  3. Material :Transparent ps.
  4. All dimensions meet EIA-481-B requirements.
  5. Thickness :  $0.35 \pm 0.05$ mm.
  6. Packing length per 22" Reel : 67.2 Meters.
  7. Component load per 13" Reel : 1800 pcs.

Circuits	Dimension				Packing (Reel/Caton)
	E	W1	W2	W3	
02~06 PIN	16.0(.630)	16.5(.650)	22.5(.886)	16.5(.650)	11
07~12 PIN	24.0(.945)	24.5(.965)	30.5(1.201)	24.5(.965)	9

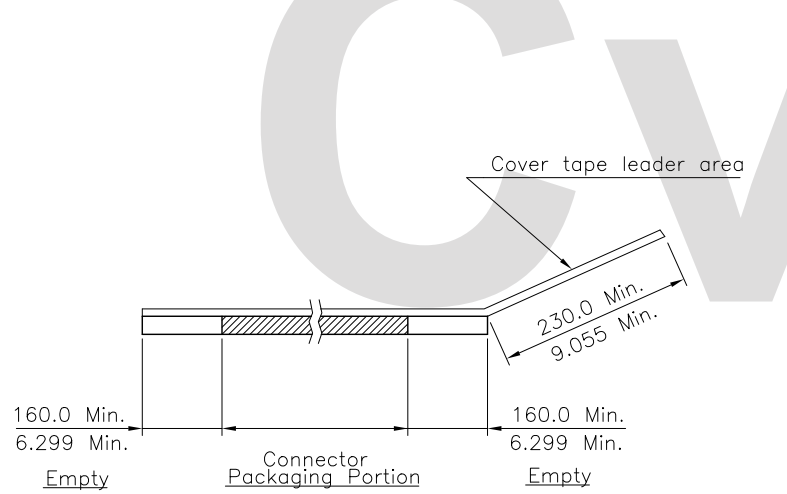

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 1.00MM(.039")	瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY: Tim	TOLERANCE UNLESS OTHERWISE SPECIFIED	WIRE TO BOARD CONNECTOR				
2					ENGINEER: Eisley	.X ±	.X' ± 1'	MATERIAL:	DRAWING NO. CI1429SA	PART NO. CI14**M1HRC-NH	
1	Tim	9/30-10'	ECN10327-0	CHECKED BY: David	10/7-10'	.XX ±	.X' ±	CUSTOMER:	SCALE	SHEET 2 OF 2	
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	10/7-10'	.XXX ±	.XX' ±				

CIVILUX CORP  
 2010.11.09  
 ISSUED