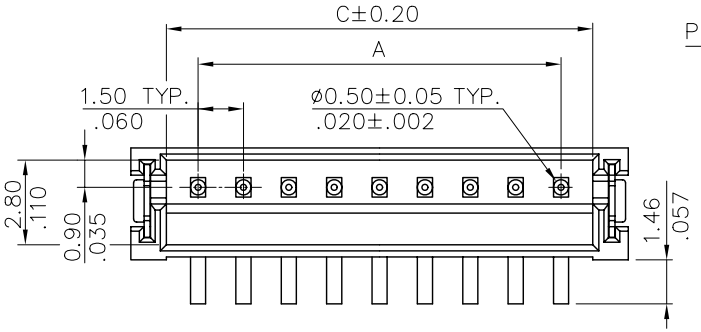

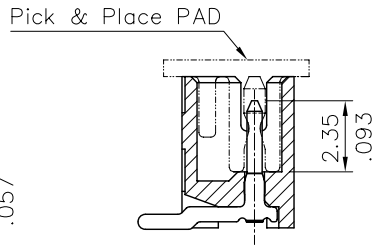

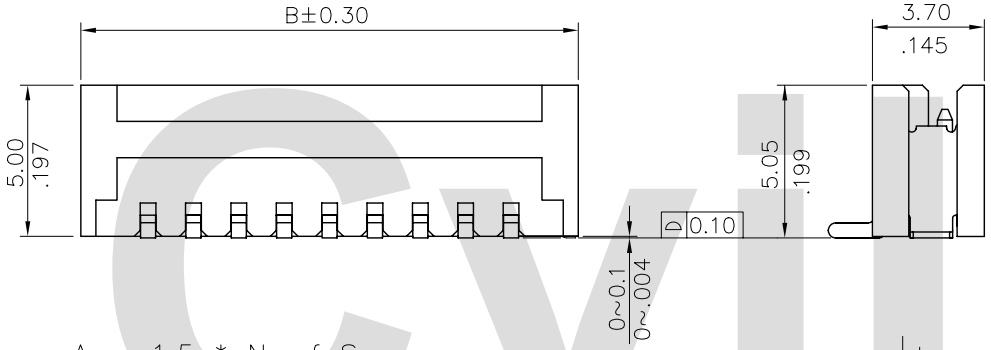

A = 1.5 * No.of Spaces
B = A + 4.5
C = A + 2.1
* Available in 2 through 15 circuits

TOLERANCE			
Dim \ Circuits	2~6P	7~10P	11~15P
A	±0.10	±0.15	±0.20

Material:
* Insulation: High Temperature Glass Filled Polyamide UL 94V-0, Color Nature (Ivory)
* Contact: Brass with Matte Tin plated
* TAB: Brass with Matte Tin plated

Ordering Code:

CI15	**	M	1	V	*	0	-	LF
①	②	③	④	⑤	⑥	⑦		⑧

① Series No.
② No. of Circuits:
③ Contacts Type: M=SMT
④ Plating: 1= 3.05μm(120u") Min. Matte Tin over 1.27μm(50u") Nickel
⑤ V = Straight Type
⑥ Packing option: R=Tape & Reel with pad
T=Tube Packing without pad
⑦ Otion: 0 = Standard
⑧ -LF= For Leadfree IR Processes

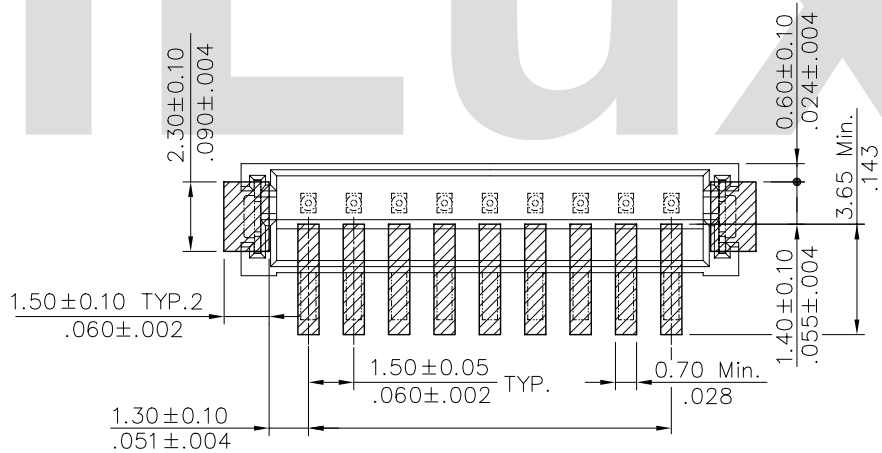

Sold Pad Pattern

Lead Free Process

RoHS Compliant

SYM	NAME	DATE	REVISIONS
4			
3			
2	Sandy	11/29-07'	ECN07498
1	Sandy	04/29-07'	ECN07153

CVILUX CORP. 2007.12.04 ISSUED

		DATE
DRAWN BY:	Sandy	11/29-07'
ENGINEER:	Eisley	11/30-07'
CHECKED BY:	Daivd	11/30-07'
APPROVED BY:	Daivd	11/30-07'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X	± 0.30/.012	X.°	± 1°
.XX	± 0.20/.008	.X°	±
.XXX	± 0.10/.004	.XX°	±

TITLE: 1.50MM(.060") (SMT V TYPE)

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI1508SC	PART NO.	CI15**M1V*0-LF
SCALE	4 / 1	SHEET	1 OF 2

NOTE :

* Reel Material : HIPS
* Carrier Material : Clear, Conductive Polystyrene Alloy
* Cover Tape Material : Polyester
* Cover Tape Peel Strength : 0.1N ~ 1.3N
* Carrier camber is within 1mm in 100mm
* All dimensions meet EIA-481-2 & EIA-481-3 requirements.

△2 * Quantity : 900 PCS/Reel

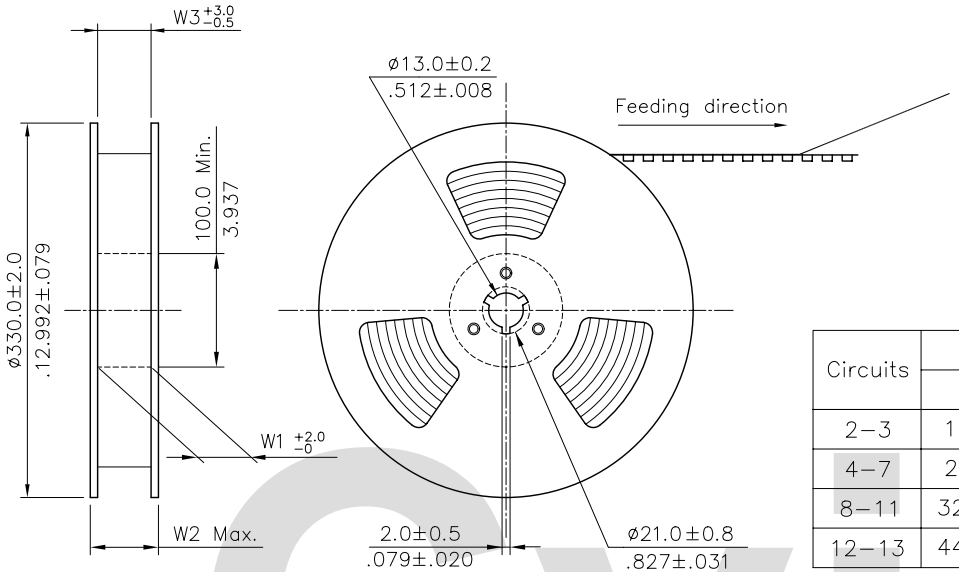

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
2~3	16.0(.630)	-----	16.5(.650)	22.5(.886)	16.5(.650)	11
4~7	24.0(.945)	------	24.5(.965)	30.5(1.201)	24.5(.965)	9
8~11	32.0(1.260)	28.4(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
12~13	44.0(1.732)	40.4(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5

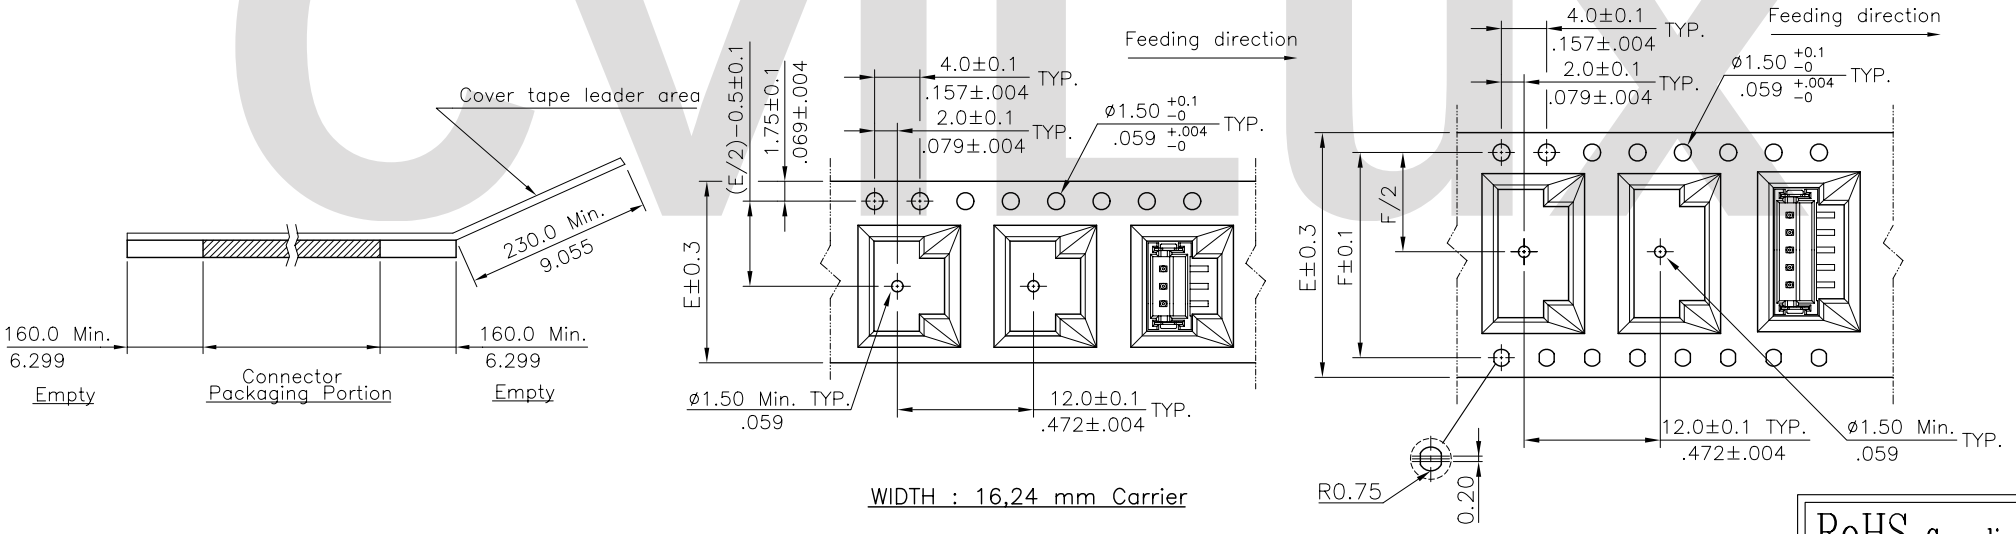

RoHS Compliant

SYM	NAME	DATE	REVISIONS
△4			
△3			
△2	Sandy	11/29-07'	ECN07498
△1	Sandy	04/29-07'	ECN07153

CVILUX CORP. 2007.12.04 ISSUED

		DATE
DRAWN BY:	Sandy	11/29-07'
ENGINEER:	Eisley	11/30-07'
CHECKED BY:	Daivd	11/30-07'
APPROVED BY:	Daivd	11/30-07'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±	X.° ± 1°
.XX ±	.X' ±
.XXX ±	.XX" ±

TITLE: 1.50MM(.060") (SMT V TYPE)

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI1508SC	PART NO.	CI15**M1V*0-LF
SCALE		SHEET 2 OF 2	